




PRECISION SERIES

Topline® Air Folder

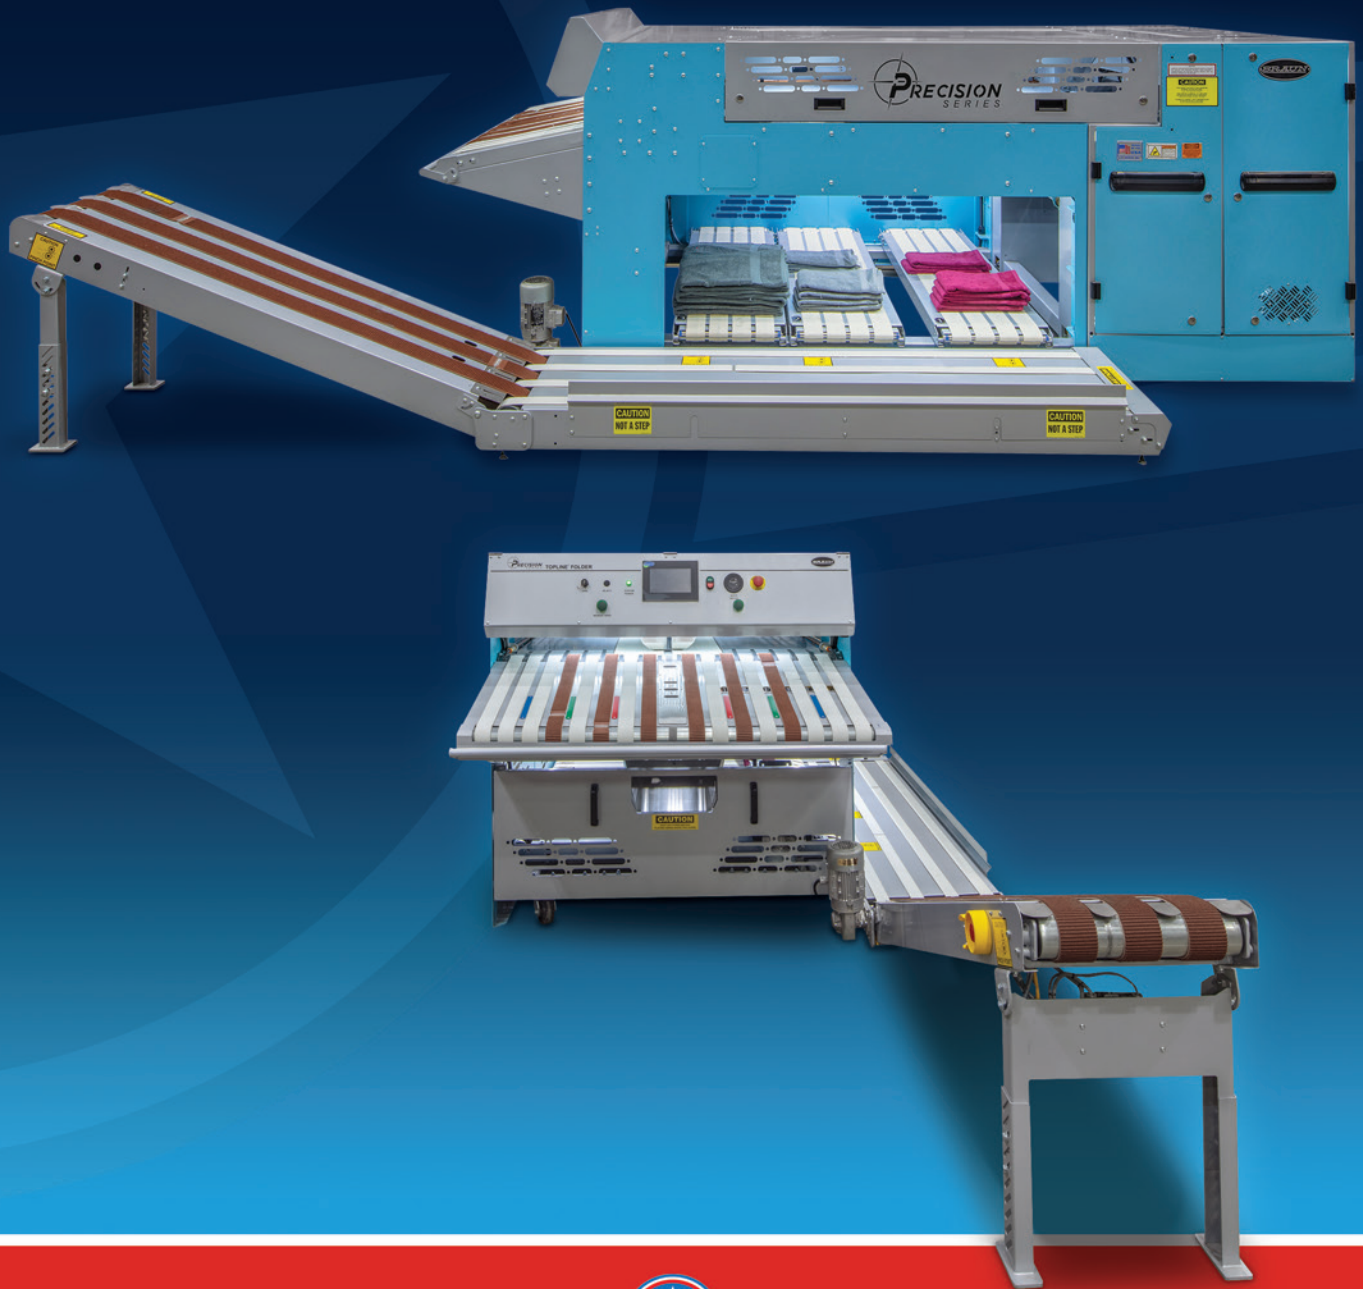

U.S.A.

ISO 9001:2015 Certified
(Quality Management System)

All Braun Products are Proudly
Manufactured in the U.S.A.

gabraun.com

PRECISION SERIES TOPLINE® AIR FOLDER


Braun's Topline® Air Folder is ideal for folding items such as towels (bath, hand, and pool), pillowcases, incontinent pads, scrubs, and patient gowns. Note: Unfolded Towels and Garments from 12" X 12" to 48" x 74".

Items can be French folded to finished sizes between 6" and 17" and cross folds in halves, thirds, and quarters.

As products are placed onto the infeed conveyor, they are automatically recognized by sensors and are then folded, sorted, and stacked according to pre-programmed fold settings. Therefore, pre-sorting is not required.

Goods are then transported to one of the dedicated stackers. A discharge conveyor is available in varying sizes depending on orientation; return-to-feed, or rear discharge.

The touch screen has the ability to show the user the proper way to feed a garment depending on the desired presentation and fold type.

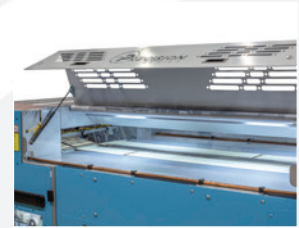

Easy access for maintenance.

OTHER STANDARD FEATURES INCLUDE:

- Color indicators on infeed table to reduce feeder error
- Advance drive troubleshooting
All information is available from the front control screen
- 165 feet per minute processing speed
- Hour meter for planning periodic maintenance
- Poly Chain Drive
- Inverter Driven
- The manual send buttons assist with pre-folding complex items on the infeed table
- Cross fold is configured with durable textured belting – providing a longer life than the commonly used elastic belting
- Manual (Sorts based off item placement onto a specified sensor)
- Color touch screen controls (English and Spanish)
- Jog forward/reverse
- Cross fold EZ-Out (to easily remove any possible jams)
- Pneumatically tensioned cross fold aids in processing thicker items.
- Two decks can be linked together to stack longer, half-folded items
- The French fold can be set to scan and adjust to item widths on the fly or be set to a specified width within the program.
- The French fold blow pipes are equipped with dual valves to help process items faster and on the fly
- Stain/Torn reject button
- Jam Detection
- Lint blow-off feature automatically cleans photocell lenses reducing maintenance

- Safety switches and guards at all pinch points
- Casters for mobility
- Illuminated emergency stops

OPTIONS:

- Voltage Options 240, 480 3ph 60hz
- Totalizing Part Counter
- Foot Pedal Reject Switch
- Poly Carbonate doors
- Machine color
- Number of stack decks (up to three)
- Delivery conveyor orientation
- Production status lights

There are three different methods of sorting:

- Length
- Width



Cross fold EZ-Out

SPECIFICATIONS

For detailed equipment specifications please consult with your Braun Regional Sales Manager or contact us by email at equipmentspecifications@gabraun.com



ISO 9001:2015 CERTIFIED
(Quality Management System)

G.A. Braun, Inc.
79 General Irwin Boulevard
N. Syracuse, NY 13212

Mail to:
P.O. Box 3029
Syracuse, NY 13220-3029

Phone
1-800-432-7286

Fax
(315) 475-4130

Parts Help Desk
1-800-432-7286 X 1

Service Help Desk
1-800-432-7286 X 2



U.S.A.

All Braun Products are Proudly
Manufactured in the U.S.A.